SINGLE POINT

PC3

Stainless Steel, Environmentally Sealed, NTEP Certified 1:3,000 Class III Single Cell, OIML C3, IP67



Picture is a representation of actual product.


Approvals

Order Information

Load Rating	Part #	Est. Weight	Price
7 kg	**202686**	2 lb	Consult
10 kg	**202687**	2 lb	Consult
30 kg	**202688**	2 lb	Consult
60 kg	**202689**	2 lb	Consult
100 kg	**202690**	2 lb	Consult
150 kg	**202691**	2 lb	Consult

Dimensions

Rated Capacity	A	B	C	D	E	F	G
kg/mm							
7 to 10	18.2	140.0	19.0	6.4	88.9	1/4-20 UNC	30.0
30 to 60	24.5	140.0	19.0	6.4	88.9	1/4-20 UNC	30.0
100 to 150	30.8	140.0	22.4	7.8	79.3	3/8-16 UNC	30.0

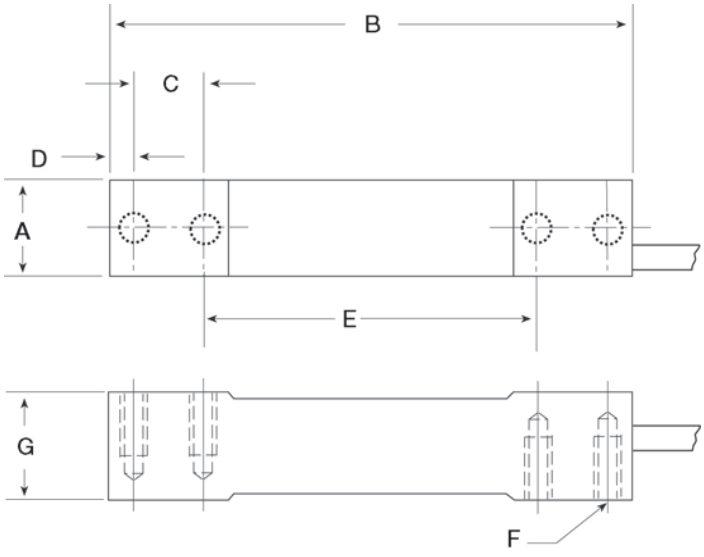

Interchangeable Products

RICE LAKE WEIGHING SYSTEMS

RL1380..... *page 164*

HBK

PWS..... *page 231*

Specifications

Full Scale Output:
2 mV/V

Output Resistance:
350 (± 10) ohm

Input Resistance:
385 (± 15) ohm

Material Finish:
Stainless Steel

Temperature Compensation:
Compensated Range
14 °F to 104 °F (-10 °C to 40 °C)
Operating Range
0 °F to 150 °F (-18 °C to 65 °C)

Seal Type:
Environmentally Sealed, IP67

Safe Overload:
150% full scale

Rated Excitation:
5 to 10 VDC

Insulation Resistance:
5,000 megohm

Max Platform Size:
7 to 30 kg: 350 × 350 mm
60 to 150 kg: 450 × 450 mm

Combined Error:
0.02% full scale

Cable Length:
10 ft

Cable Diameter:
0.140 in
Polyurethane jacket

Color Code:
Green +Excitation
Black -Excitation
White +Signal
Red -Signal
Yellow Shield

Warranty:
One-year limited

Approvals:
FM
NTEP
OIML