
S-BEAM

UB6

Stainless Steel, Hermetically Sealed, OIML C3, IP69K

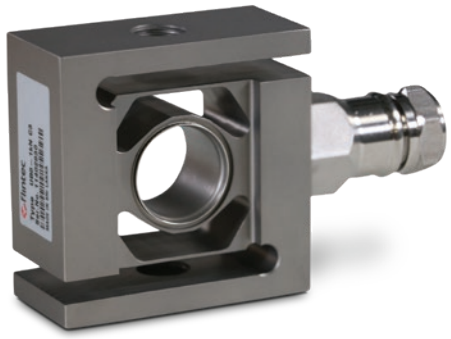

Picture is a representation of actual product.

Approvals

OIML FM APPROVED


Order Information

Load Rating	Part #	Est. Weight	Price
1 kN	**36214**	3 lb	Consult
2 kN	**36215**	3 lb	Consult
5 kN	**36216**	3 lb	Consult

Dimensions

Rated Capacity	A*	B	D	E
kN/in				
1 to 5	1/2-20 UNF	1.20	2.42	2.42

**Also available with metric threads*

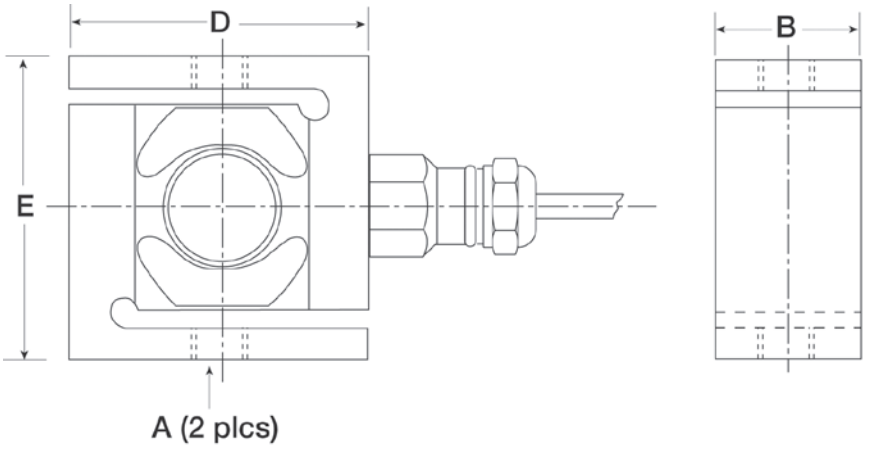

Specifications

Full Scale Output:
2.0 mV/V
mV/V/ohm calibration

Output Resistance:
1,000 (± 2) ohm

Input Resistance:
1,100 (± 50) ohm

Material/Finish:
Stainless steel

Temperature:
Operating range
0 °F to 150 °F (-18 °C to 65 °C)

Seal Type:
Hermetically sealed, IP69K

Safe Overload:
200% full scale

Rated Excitation:
5 to 10 VDC (15 V maximum)

Combined Error:
0.02% full scale

Insulation Resistance:
5,000 megohm

Cable Length:
20 ft

Cable Diameter:
0.196 in
Polyurethane jacket

Cable Color Code:
Green +Excitation
Black –Excitation
White +Signal
Red –Signal
Yellow Shield

Warranty:
One-year limited

Approvals:
FM
OIML