
SINGLE-ENDED BEAM

Z6

Stainless Steel, Welded Seal, OIML C3, IP68

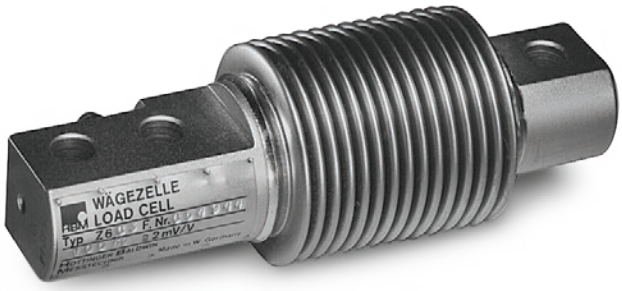

Picture is a representation of actual product.

Approvals

FM APPROVED · OIML · Ex


Available upon request


Order Information

Load Rating	Part #	Est. Weight	Price
OIML C3			
10 kg	**36173**	2 lb	Consult
20 kg	**36174**	2 lb	Consult
50 kg	**36175**	2 lb	Consult
100 kg	**36176**	2 lb	Consult
200 kg	**36177**	2 lb	Consult
OIML D1			
5 kg	**36172**	2 lb	Consult

Dimensions

Rated Capacity	H	L	L1	L2	L3	L4	L5	L6	W	W2	D
kg/mm											
5 to 200	31.0	123.0	18.0	82.0	9.9	21.0	45.0	27.9	42.0	20.1	8.2

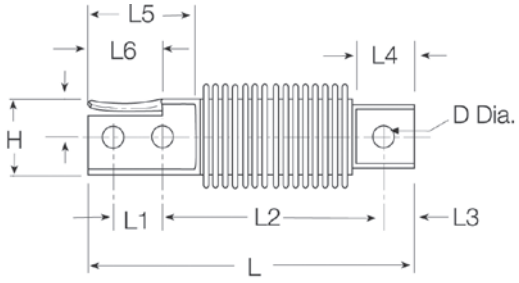



Interchangeable Products

RICE LAKE WEIGHING SYSTEMS
RL9018SS ..... *page 107*

RICE LAKE WEIGHING SYSTEMS
RLHBB**

VPG® REVERE
SHB ..... *page 253*

VPG® TEDEA-HUNTLEIGH
355 ..... *page 309*

METTLER TOLEDO®
MTB***

*** Except for 500 kg*

*** Color code is different*

Specifications

Full Scale Output:
2.0 mV/V

Output Resistance:
356 ohm

Input Resistance:
350 to 400 ohm

Material/Finish:
Stainless steel

Temperature:
Operating range
0 °F to 150 °F (-18 °C to 65 °C)

Seal Type:
Welded-seal, IP68

Safe Overload:
150% full scale

Rated Excitation:
5 to 10 V DC (15 V maximum)

Combined Error:
0.05% full scale

Insulation Resistance:
5,000 megohm

Cable Length:
10 ft

Cable Diameter:
0.190 in PVC jacket

Cable Color Code:
Blue +Excitation
Black –Excitation
White +Signal
Red –Signal
Green +Sense
Grey –Sense

Warranty:
One-year limited

Approvals:
FM
OIML
Ex (available upon request)