
MS200

Portable Monorail Scale

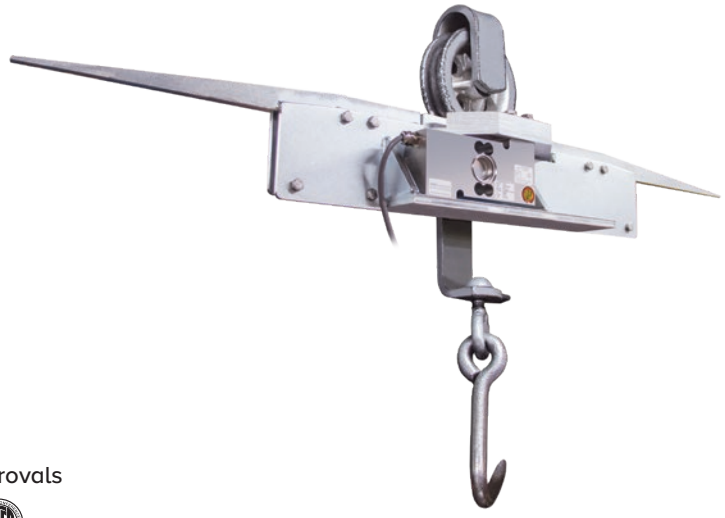

Approvals

Standard Features

- 8-inch live-rail designed to weigh one trolley
- 750 × 0.5 lb resolution
- Compatible with both 3/8 in and 1/2 in rails
- Requires less than 41 in of straight rail to install
- Electroless nickel plated, steel construction
- 25 ft of load cell cable for flexible installation
- Slightly recessed live-rail for the trolley roller provides stable weighments

Specifications

Construction:
Electroless nickel plated steel construction, stainless steel hardware

Load Cell Construction:
Stainless steel

Bridge Resistance:
350 ohm nominal

Rated Output:
2 mV/V

Nonlinearity:
0.03% full scale

Warranty:
One-year limited


Approvals:
NTEP CC 90-003, Class III, 1500 d

Part Number/Price

Part #	Description	Est. Weight	Price
19743	MS200HB, NTEP Certified portable	38 lb	Consult

Options/Accessories

Part #	Description	Price
16984	Additional operating manual	Consult
167585	Replacement load cell, 500 kg 2 mV/v 350 ohm SST construction, with 25 ft of cable	Consult

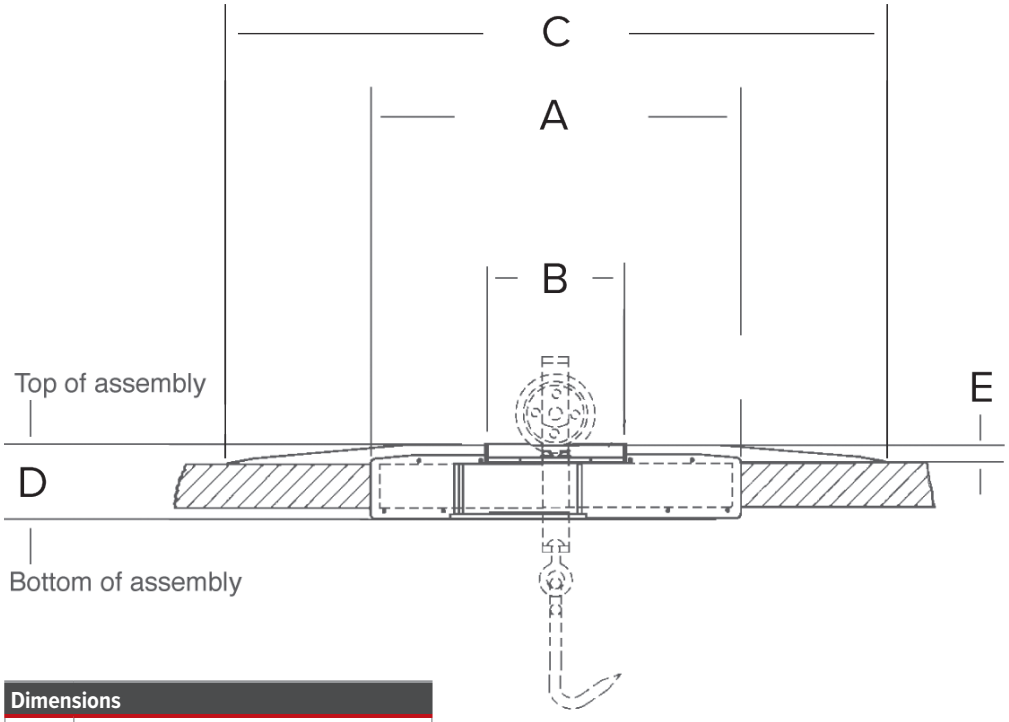

Dimensions	
A	21.00 in (533 mm)
B	8.00 in live rail (203 mm)
C	40.32 in (1,024 mm)
D	4.50 in (114 mm)
E	1.13 in (29 mm)

An ISO 9001:2015 Accredited Company ©2023 Rice Lake Weighing Systems 1/23 Prices and specifications subject to change without notice. Visit ricelake.com for current prices.